



Input Voltage	120V AC
Wattage	6.5W
Nominal Lumens	600lm
CCT	3000K, 2700K
CRI/R9	90+, 53+
Color Fidelity (Rf), Gamut (Rg)	91, 99
Dimming	Phase Dimmable
Dimming Range	100% - <4%
Beam Angles	15°, 35°



RoHS



SunLight2® Builder's Edition LED bulbs are designed for applications where High CRI, great dimming performance, and reliability, are integrated in a cost-effective solution. SunLight2® builder's edition meets Energy Star & California Title 20 and 24 JA8 requirements.

FEATURES

- **High CRI** - High CRI 90+, R9 53+, TLCI 92 designed to provide superior color accuracy for residential, commercial and retail lighting applications
- **Low Flicker Index** - Providing an ideal and user health focused light source.
- **Energy Efficiency** - Energy efficient equivalent to 75W halogen bulb
- **Protection** - Suitable for use in both open and fully enclosed fixtures.
- **Fully Dimmable** - ELV, TRIAC, dimmable


APPLICATIONS

- Hotels & Hospitality
- Galleries & Museums
- High-End Retail
- Architectural track lighting, pendants, downlights, and other indoor and outdoor applications
- Suitable for damp locations


MODEL SPECIFICATIONS

MODEL NUMBER	WATTS	INPUT VOLTAGE	CCT	LUMENS	BEAM ANGLE	CASE FINISHES
GU10A6W2700K15W	6.5W	120VAC	2700K	570lm	15°	White
GU10A6W2700K35W			2700K	570lm	35°	White
GU10A6W3000K15W			3000K	600lm	15°	White
GU10A6W3000K35W			3000K	600lm	35°	White


SPECTRORADIOMETRIC CHART

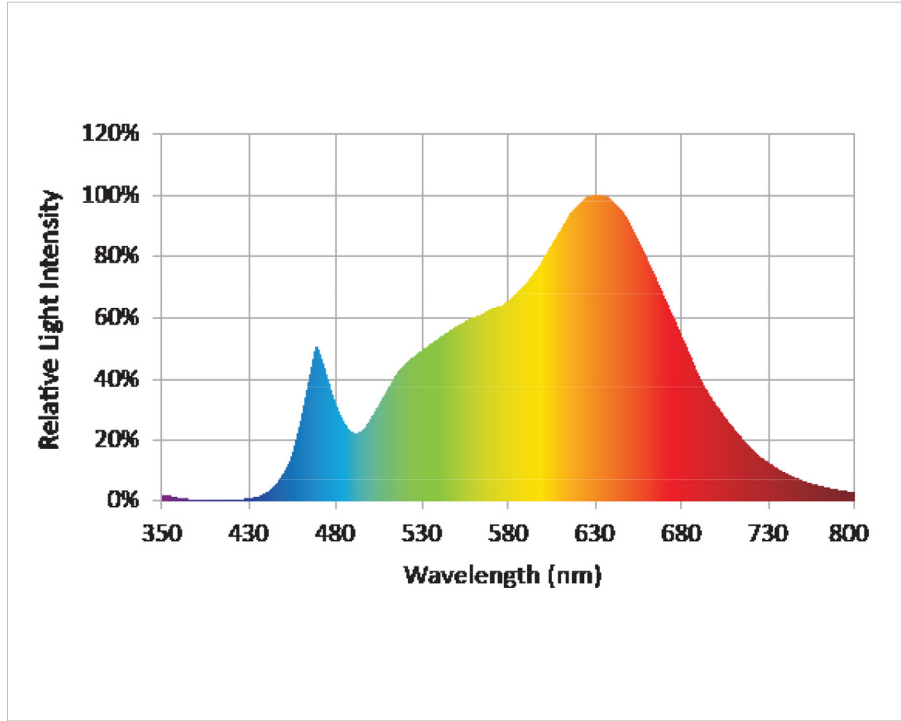

CRI TEST

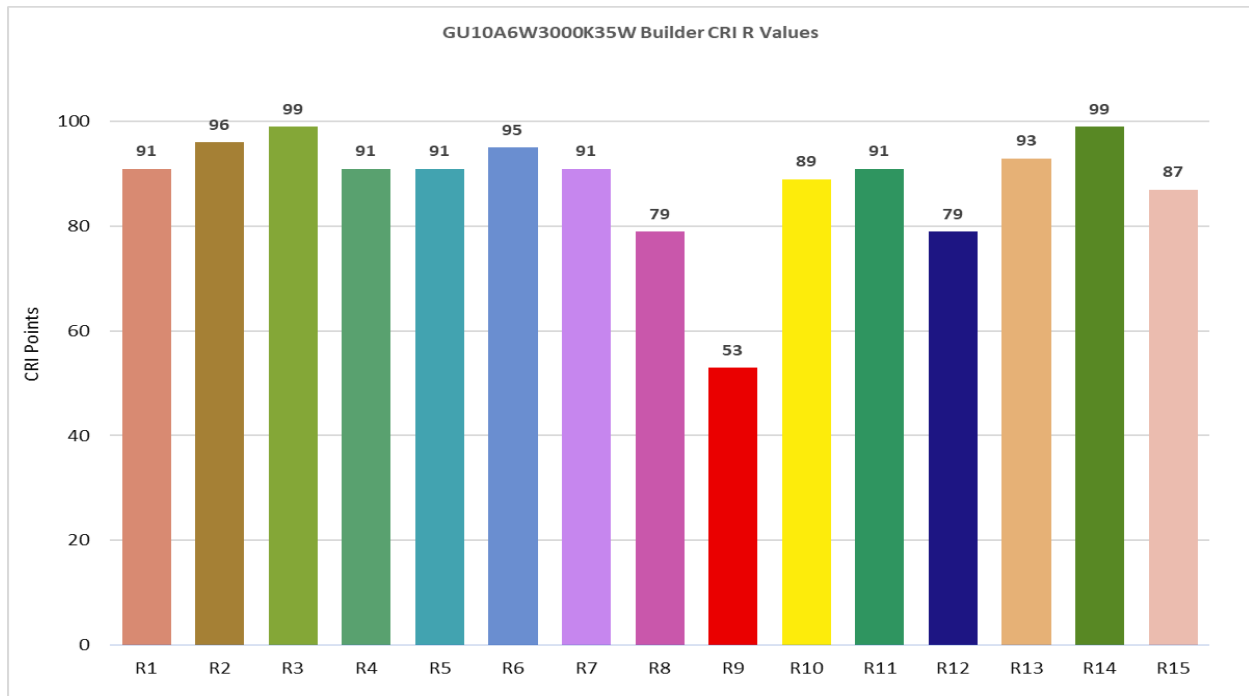


TM30 TEST

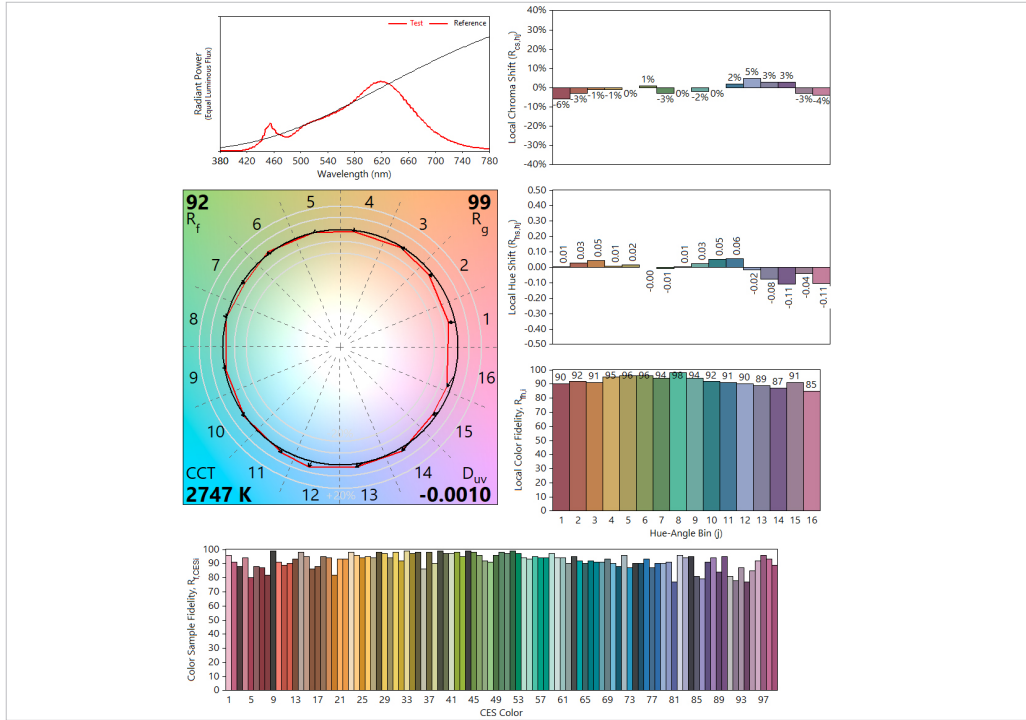

*Data shown based on GU10A6W2700K35W model




DIMMING CURVE

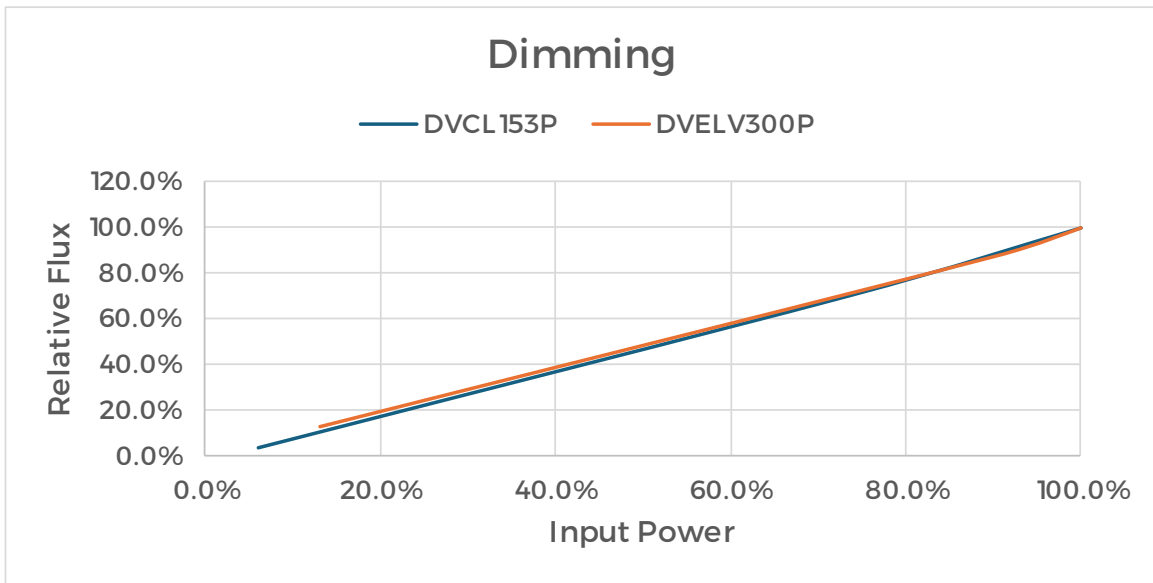

MECHANICAL SPECIFICATIONS

MODEL NUMBER	DIMENSIONS	SHIPPING WEIGHT
GU10	52 x 50 mm	56g

PACKING



GU10 (Builder's Edition)

