



Tunable CCT	6500K - 2200K
Lumens	1200lm
Beam Angle	24°, 36°, 60°
CRI / R9 (Max.)	97/98*
Wattage	18W
Input Voltage	120VAC
Dimming	Wireless
Power Factor	>0.9
Max. Ambient Tc	35°



SunLight2 is an Architectural-Grade LED bulb optimized for an eye healthy lighting experience with no flicker. Its high CRI, full spectrum light provides exceptional color accuracy using patented LED technology. Wireless color tuning control let's you dial in the perfect illumination for any architectural lighting application.

FEATURES

- Direct replacement for halogen bulbs
- Adjustable CCT for human-centric lighting and circadian health
- High CRI 97, R9 98*, TLCI 97
- WiFi & Bluetooth compatible
- No flicker
- 3 years / 25k hours warranty

APPLICATIONS

- Retail, Office and Commercial lighting
- Color-critical task lighting (apparel, groceries, hardgoods & toys)
- Down light (new & retrofit)
- Desk lamps
- Pendants
- Indoor & Outdoor

MODEL SPECIFICATIONS


MODEL NUMBER	INPUT VOLTAGE	Tunable CCT	LUMENS	BEAM ANGLE	*CASE FINISHES
PAR38A18W6522KWZCT24*	120VAC	@ 2200K	900lm	24°	S(Silver), W (White), B(Black)
		@ 6500K	1200lm		
PAR38A18W6522KWZCT36*	120VAC	@ 2200K	900lm	36°	
		@ 6500K	1200lm		
PAR38A18W6522KWZCT60*	120VAC	@ 2200K	900lm	60°	
		@ 6500K	1200lm		

* CRI & R9 shown @ 3200K


Custom Finishes Available

SPECTRORADIOMETRIC CHARTS

6500K

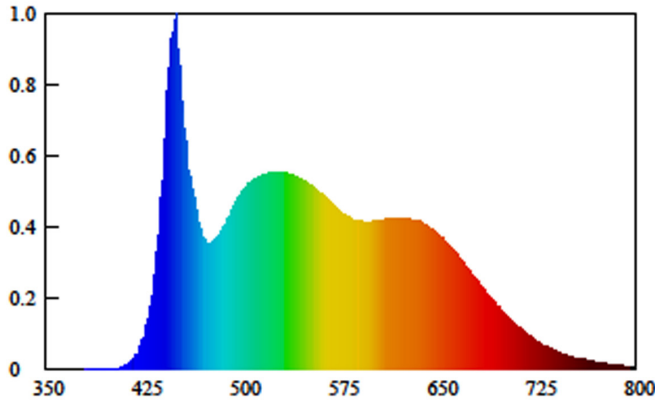


2200K

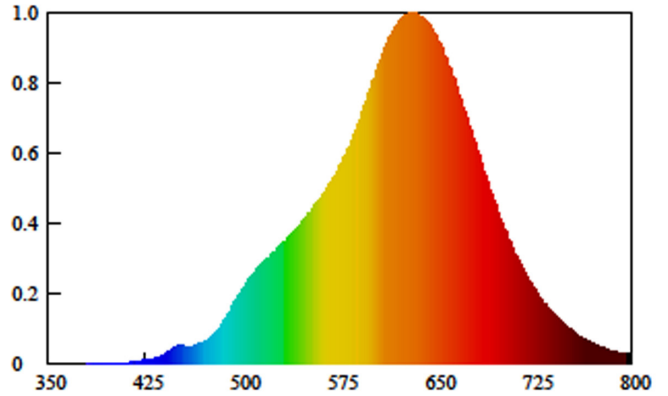


CRI Charts

6500K

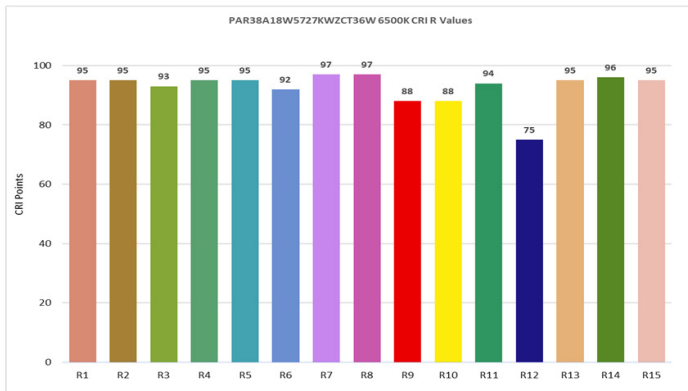



2200K

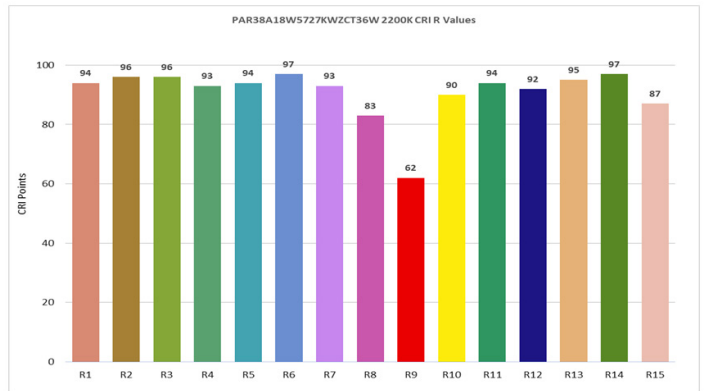


TM30 TEST

6500K

2200K

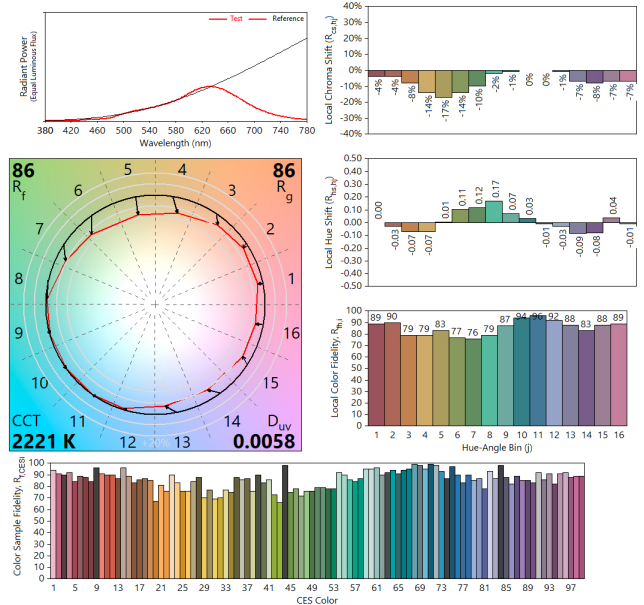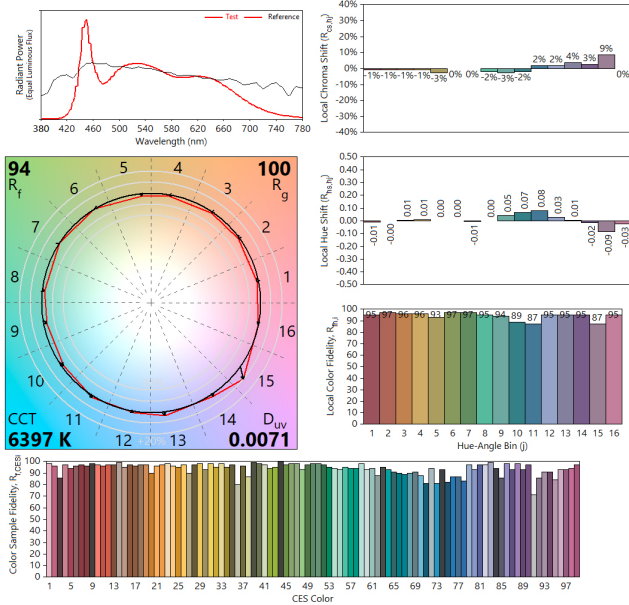

DIMMING CURVE

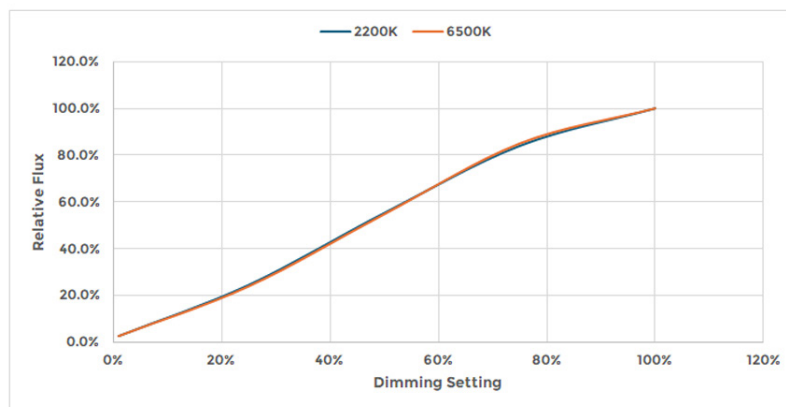

MECHANICAL SPECIFICATIONS

PAR38

