



Tunable CCT	6500K - 2200K
Lumens	1200lm
Beam Angle	24°, 36°, 60°
CRI / R9 (Max.)	97/98*
Wattage	18W
Input Voltage	120VAC
Dimming	Wireless
Power Factor	>0.9
Max. Ambient Tc	35°



SunLight2 is an Architectural-Grade LED bulb optimized for an eye healthy lighting experience with no flicker. Its high CRI, full spectrum light provides exceptional color accuracy using patented LED technology. Wireless color tuning control let's you dial in the perfect illumination for any architectural lighting application.

### FEATURES

- Direct replacement for halogen bulbs
- Adjustable CCT for human-centric lighting and circadian health
- High CRI 97, R9 98\*, TLCI 97
- WiFi & Bluetooth compatible
- No flicker
- 3 years / 25k hours warranty

### APPLICATIONS

- Retail, Office and Commercial lighting
- Color-critical task lighting (apparel, groceries, hardgoods & toys)
- Down light (new & retrofit)
- Desk lamps
- Pendants
- Indoor & Outdoor

### MODEL SPECIFICATIONS

MODEL NUMBER	INPUT VOLTAGE	Tunable CCT	LUMENS	BEAM ANGLE	*CASE FINISHES
PAR38A18W6522KBTWCT24*	120VAC	@ 2200K	900lm	24°	S(Silver), W (White), B(Black)
		@ 6500K	1200lm		
PAR38A18W6522KBTWCT36*	120VAC	@ 2200K	900lm	36°	
		@ 6500K	1200lm		
PAR38A18W6522KBTWCT60*	120VAC	@ 2200K	900lm	60°	
		@ 6500K	1200lm		



\*\* CRI & R9 shown @ 3200K

Custom Finishes Available

**SPECTRORADIOMETRIC CHARTS**

**6500K**



**2200K**

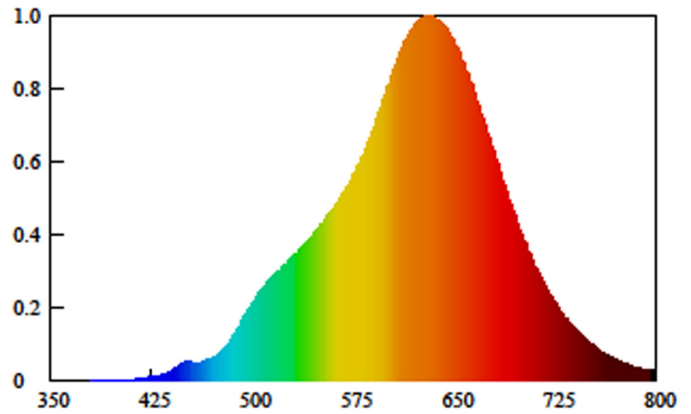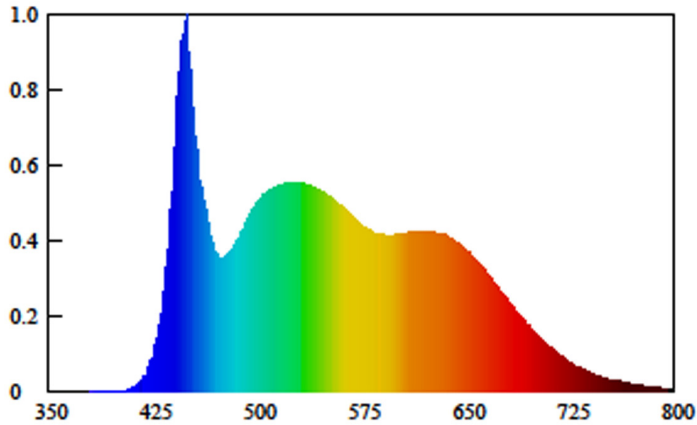

**CRI Charts**

**6500K**



**2200K**

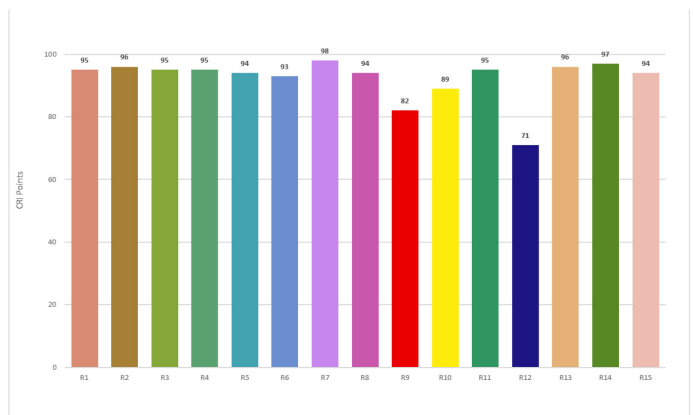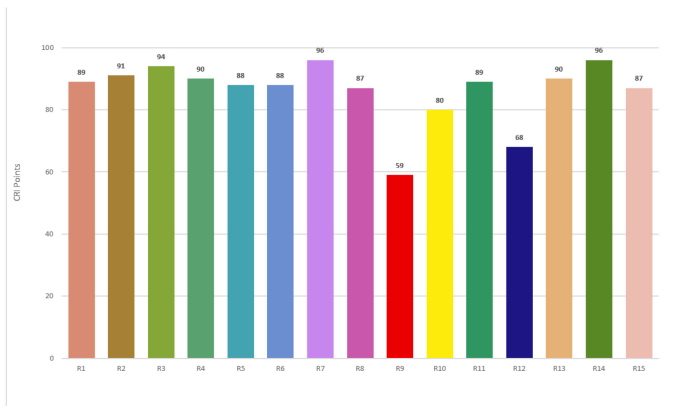

TM30 TEST


6500K

2200K

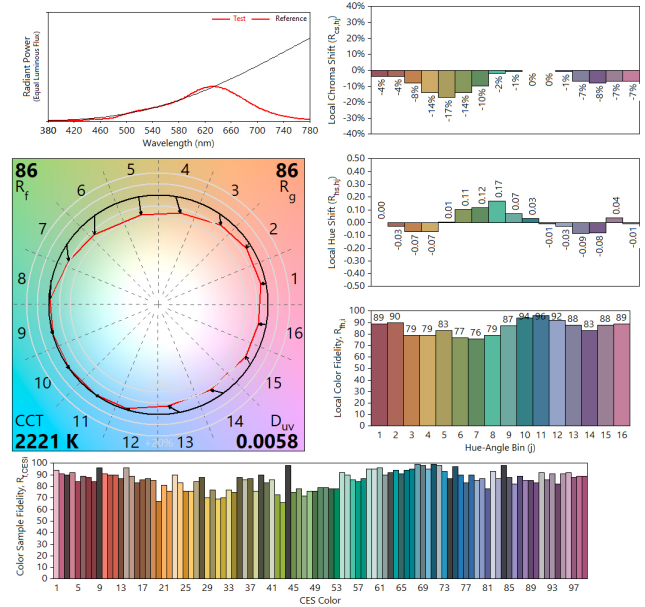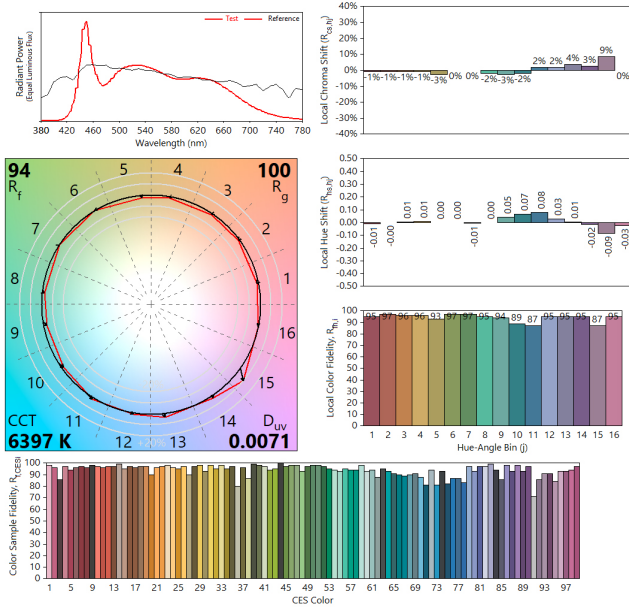

DIMMING CURVE

Flux vs Dimming

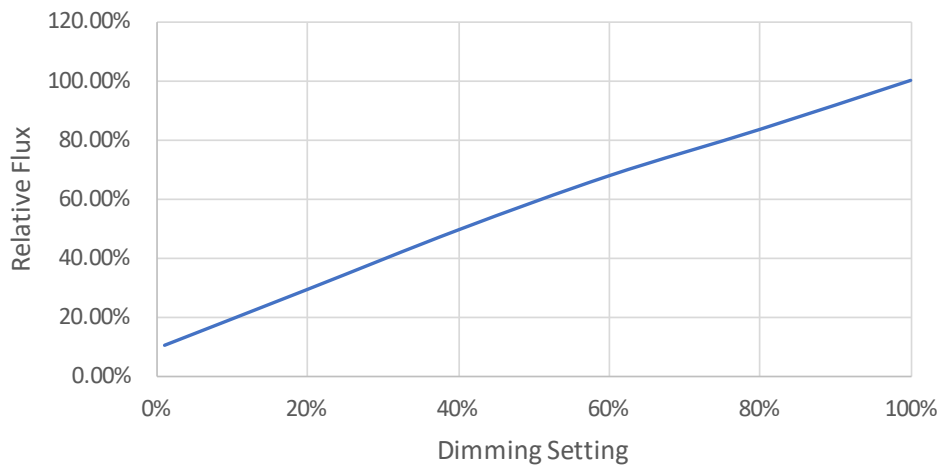

MECHANICAL SPECIFICATIONS

PAR38

