



Input Voltage	120V AC
Wattage	7W
Nominal Lumens	500lm
CCT	2700K, 3000K
CRI/R9	97+, 95+
Color Fidelity (Rf), Gamut (Rg)	96, 103
Percent Flicker	<20%
Dimming	Phase Dimmable
Dimming Range	100% - <3%
Beam Angles	24°, 36°, 60°



RoHS



SunLight2 is an Architectural-Grade LED bulb optimized for an eye healthy lighting experience with low blue emission and no flicker. Its high CRI, full spectrum light provides exceptional color accuracy using patented LED technology.

FEATURES

- Direct replacement for halogen bulbs
- GU10 base
- High CRI 97+, R9 95+, TLCI~100
- Low blue emission for eye health
- Zero ultraviolet emission, won't fade colors
- Beam angles 24°, 36° or 60°
- No flicker
- 3 years / 25k hours warranty

APPLICATIONS


- Residential and Hospitality applications
- Color-critical task lighting (apparel, groceries, hard goods & toys)
- Track lighting
- Down light (new & retrofit)
- Desk lamps
- Pendants
- Indoor & Outdoor

MODEL SPECIFICATIONS


120V (2700K)						
MODEL NUMBER	Watts	Input Voltage	CCT	LUMENS	BEAM ANGLE	*CASE FINISHES
GU10A7W2700K24*	7W	120V AC	2700K	500lm	24°	S(Silver), W(White), B(Black)
GU10A7W2700K36*	7W		2700K	500lm	36°	
GU10A7W2700K60*	7W		2700K	500lm	60°	

120V (3000K)						
MODEL NUMBER	Watts	Input Voltage	CCT	LUMENS	BEAM ANGLE	*CASE FINISHES
GU10A7W3000K24*	7W	120V AC	2700K	530lm	24°	S(Silver), W(White), B(Black)
GU10A7W3000K36*	7W		3000K	530lm	36°	
GU10A7W3000K60*	7W		2700K	530lm	60°	


DIMMING CURVES

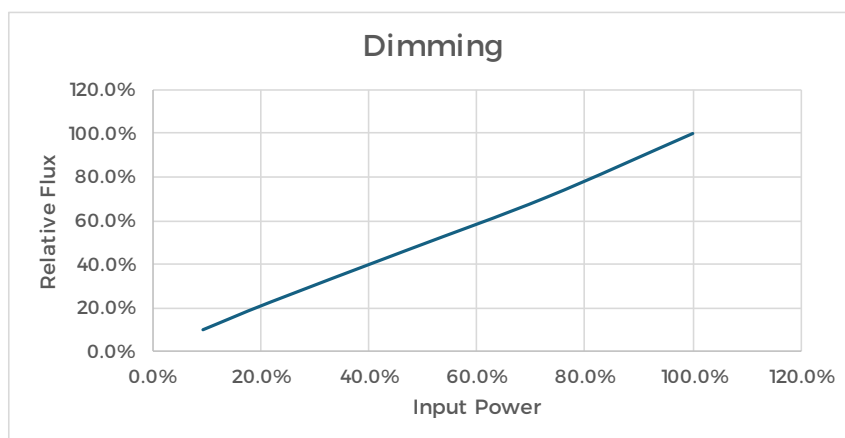


SPECTRORADIOMETRIC CHARACTERISTICS

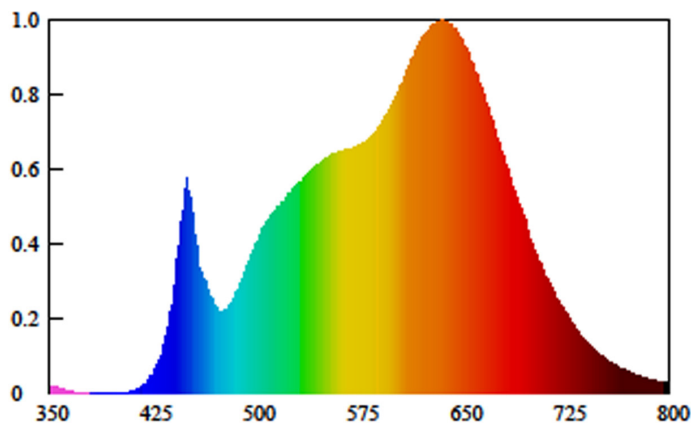

CRI TEST RESULTS

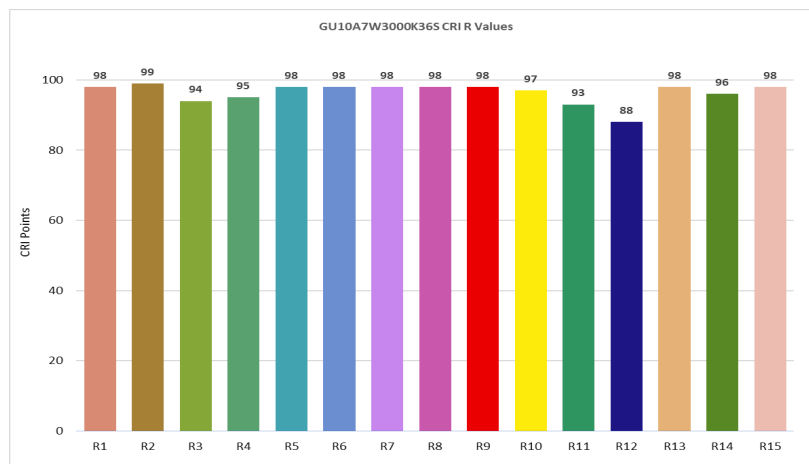

TM-30 -18 REPORT

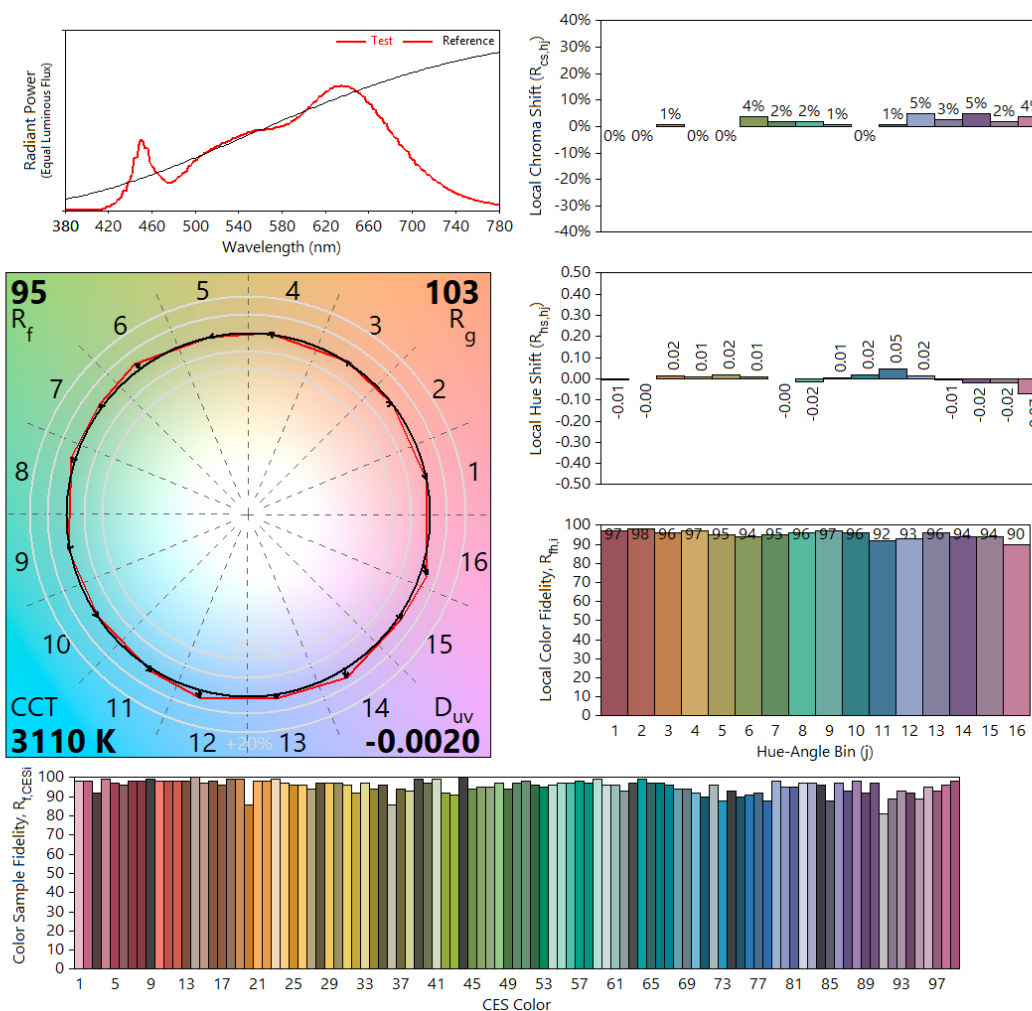

MECHANICAL SPECS

